


## 2 Door Controller

ORC-2DC

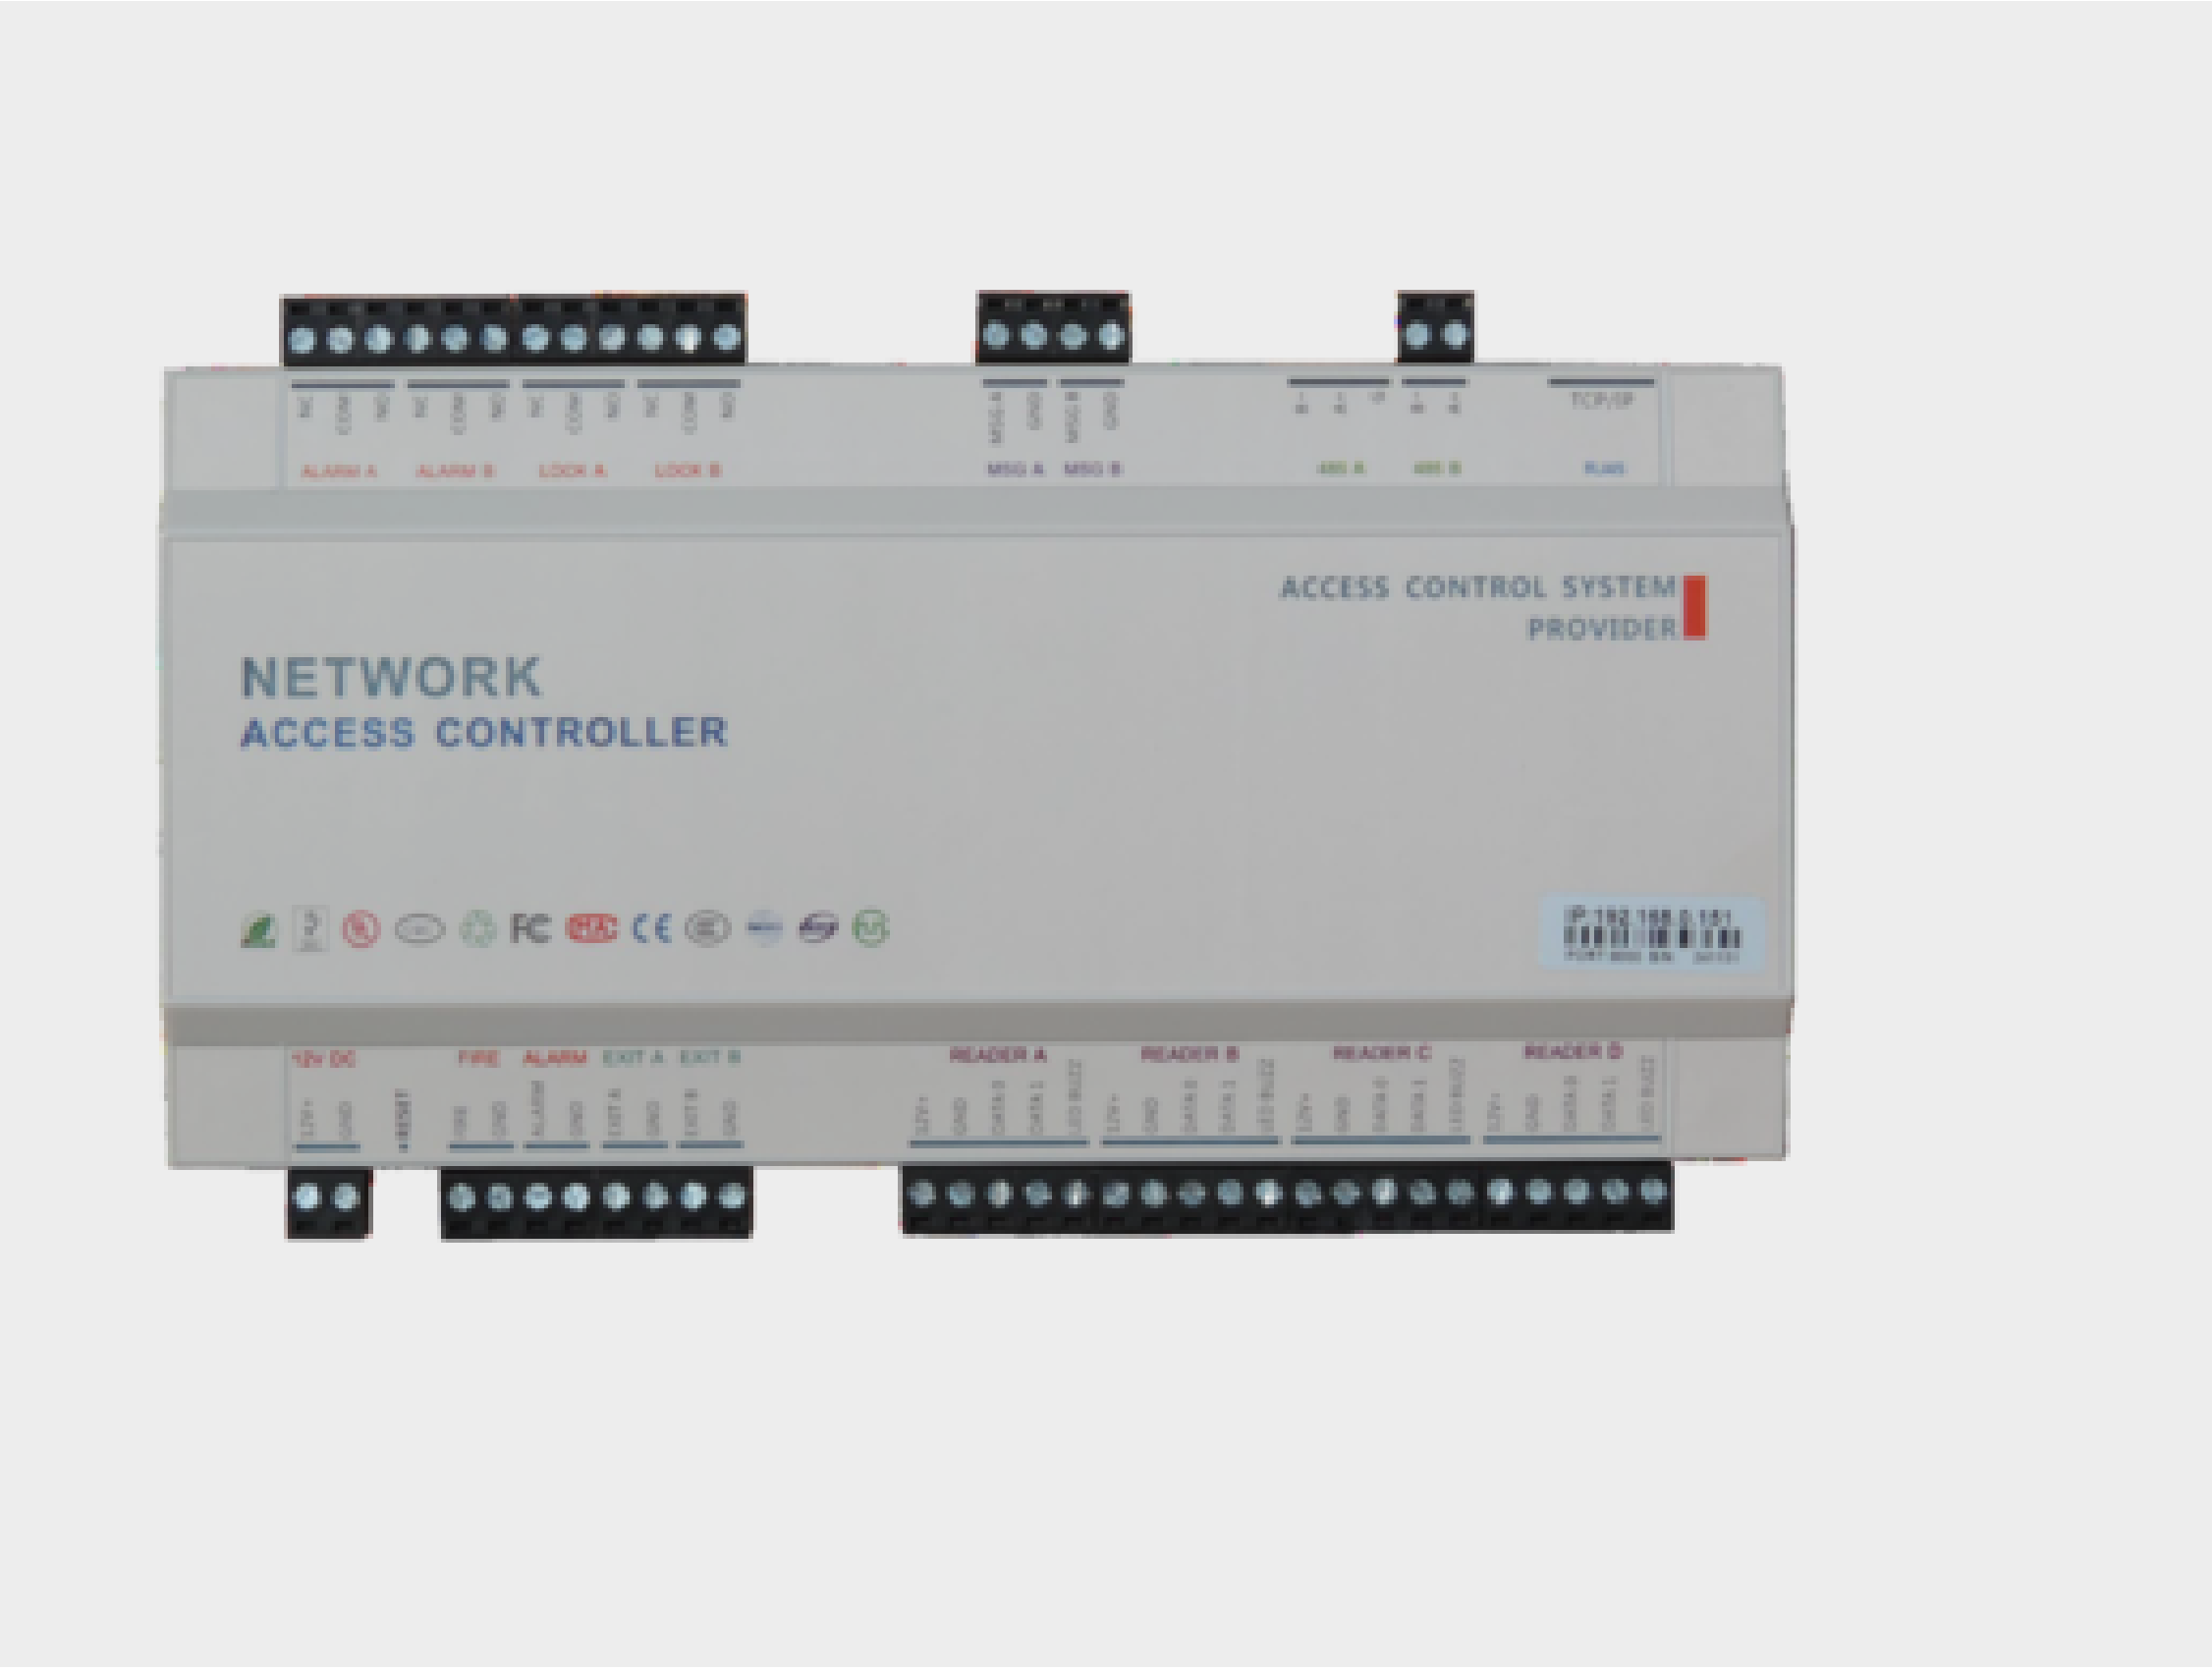

### DETAILS

Size	210mm×125mm×22mm
Inputs	4X Wiegand Reader, 1x Fire, 1x Alarm, 2x Exit, 2x MSG
Outputs	2 + 2 Relays
Communication	TCP/IP + RS485
Casing	YES - DIN rail
Power Supply	Not included

### DESCRIPTION

TCP/IP 2 Door Controller designed for read IN/OUT installations. Can be used as a traditional 2 door controller read IN/ Exit Out.

### TECHNICAL INFORMATION

Mounting Type	DIN Rail
Working Voltage	12V DC
Working Current	< 80mA
Rated Power	< 5W
Humidity	10% - 95% R.H
Temperature	< 60'C
Weight	0.3KG
Users	30,000
Events	50,000

### NOTES

Standard 10/100M TCP/IP communication, 50,000 last events, 30,000 users, RS485 and Wiegand reader input, Compatible with Orcomm ORC-AC-S range software.