

## Quick Guide for ORC-CONIPHS-V



ORC-CONIPHS-V Video Desk phone is ideal for concierge calling.

The built in camera allows video call from concierge to the residents with in the apartment.

Weblink <https://www.orcomm.co.uk/product/orc-coniphs-v/>

Default web login: U: admin P: admin

## Set up IP address

Set up IP address to the same range as the network which the intercoms are connected to.

## Remote Directory

Web interface

- Directory
  - Remote Phone book

Enter IP address of PC followed by port 8080, then /phonebook

Example 10.0.10.5:8080/phonebook

Enter a name / reference for the phone book.

Click Confirm

The screenshot shows the Yealink T58 web interface. On the left is a dark sidebar with a menu containing: Status, Account, Network, Dsskey, Features, Settings, Directory (expanded), Local Directory, Remote Phone Book (highlighted in blue), Phone Call Info, LDAP, Multicast IP, Settings, and Security. The main content area has a yellow warning banner at the top: "Default password is in use. Please change!". Below this is a table with 5 rows for configuring remote phone books. The first row is populated with "10.0.10.5:8080/phonebook" in the "Remote URL" column and "orcomm remote" in the "Display Name" column. Below the table are two settings: "Incoming/Outgoing Call Lookup" with a toggle switch set to "ON", and "Update Time Interval (Seconds)" with a text input field containing "3600". At the bottom of the interface are "Confirm" and "Cancel" buttons.

#	Remote URL	Display Name
1	10.0.10.5:8080/phonebook	orcomm remote
2		
3		
4		
5		

Incoming/Outgoing Call Lookup  ON ?

Update Time Interval (Seconds)  ?

## Enabling Remote Directory

Once you have entered the Remote Phone book it will appear in the options

Web interface

- Directory
  - Settings

Move the Remote Phone book into the Enabled section on the right

Click Confirm

**Yealink | T58**

Default password is in use. Please change!

### Directory ?

Disabled (2)	Enabled (2)
<input type="checkbox"/> History	<input type="checkbox"/> Local Directory
<input type="checkbox"/> Blacklist	<input type="checkbox"/> Remote Phone Book

### Search Source List In Dialing ?

Disabled (0)	Enabled (3)
	<input type="checkbox"/> Local Directory
	<input type="checkbox"/> History
	<input type="checkbox"/> Remote Phonebook

Recent Call In Dialing  ON ?

**Confirm** **Cancel**

## Remote control

This feature allows calling from the PC through the phone.

### Web interface

- Features
  - Remote Control

Enter IP address of the PC into ACTION URI ALLOW IP LIST

The screenshot displays the Yealink T58 web interface. The top header shows 'Yealink | T58'. A left-hand navigation menu is visible, with 'Remote Control' highlighted in blue. The main content area features a yellow warning banner: 'Default password is in use. Please change!'. Below this, the 'Remote Control' settings are listed:

Setting	Value	Help
Push XML Server IP Address	<input type="text"/>	?
Username	<input type="text"/>	?
Password	<input type="password"/>	?
SIP Notify	<input type="checkbox"/> OFF	?
Block XML in Calling	<input type="checkbox"/> OFF	?
Action URI Allow IP List	10.0.10.5	?
CSTA Control	<input type="checkbox"/> OFF	?

## Concierge Software

Advanced menu by double clicking on the orcomm bottom right corner



Default password: settings

## Administration



Default password: admin

## SIP settings

Orcomm Concierge

— □ ×

Show Alarms  
Wednesday  
**17 Nov**  
10:25 PM

Advanced Directory Manager	RTSP Manager	Change Password	Broadcast Concierge	HVAC Control
Manage Buildings	Manage SQL Database	Debug	Legacy Provision	Elevator Setup
Manage Groups	SIP Settings			Alarm View
Directory Display Settings	Desk Phone Settings			
Back				

Directory    Messaging    Events

**orcomm**

Check it is enabled for Direct IP calling

Sip Phone Configuration

Direct IP Calling

Registration Status: RegistrationSucceeded

Display Name: Concierge

User Name:

Authentication ID:

Password:


Domain/Proxy:

SIP Port: 5060

Register with domain

OK    Cancel

## Desk Phone Settings

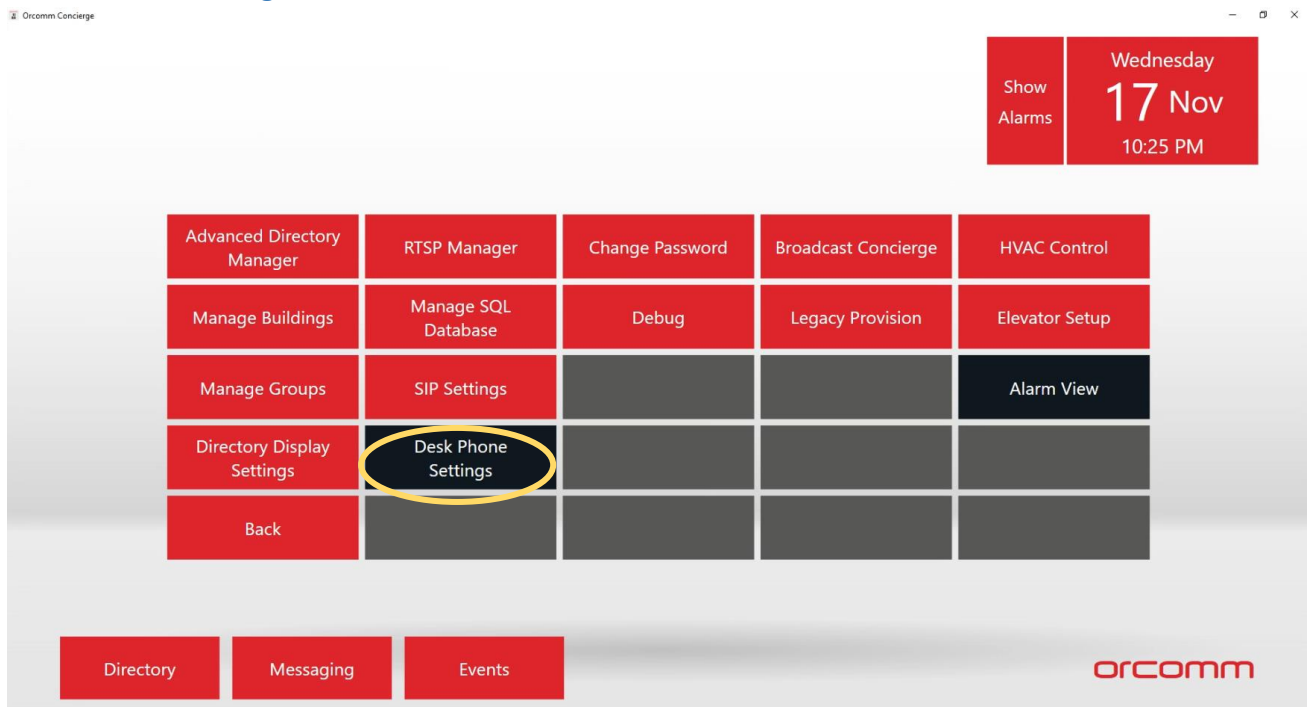

Enable

Choose Phone type

Enter IP address of Phone

Enter username and password of phone (Yealink default U: admin P: admin)

Click [OK]

