

Dimming Performance Test Results

LED information

Model	TEMPUS-2-MINI-WH-3000K
Driver Product Code	DOMINO-140MA-DR-DIM
Batch No.	DRV - 17364 ENG - 9002
LED Type	Engine + Driver
Soft Start	No
Rated Power (W)	3
Type	LED
Control Type	Trailing


LED Image



Switch / control information

Dimmer Switch Model	DIGI-DM
PerformanceMin-Typical (MAX)	2-12 (12)
Range% (no. of lamps)	15-100 (1-4)20-100(5-12)
MinSet	10%-15% see notes
MaxSet	88%
Dimming set to	Trailing

Additional Image

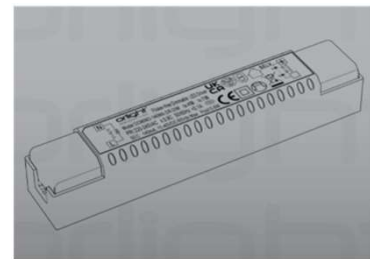

Testing Environment

Voltage	236
F (Hz)	50
Room temp	23
Current Draw (Max)	N/A
PF at Max	N/A
Tester Initials	JS
Date	03/11/2021

Printed Date 02/12/2021

Overall performance

Overall Rating Holy Grail

Diming Smoothness OK

Audible Noise on Dimmer No noise

Audible Noise on Driver slight buzz not really noticable at low level dimming

Comments Smooth dimming and incredibly stable throughout dimming range. With 1-4 lamps, could see extra flick start (only noticed on 4 driver out of 12). However, with 4 or more lamps - at 10%, most lamps will not energize. Set min% to step higher until lamp comes on. However, one can dim down to 10% and its stable.

Other Comments For this combination ensure max is set to 12 steps down (88%) from MAX. 88% is still MAX in N/A

Other Reference TEMPUS_2_MINI_WH_3000K DOMINO_140MA_DR_DIM