


## DILX-1G-CB - 1 Gang Control Box



### Description

DIGILUX 1 gang control box constructed from Polycarbonate and finished in matt black.

### Dimensions

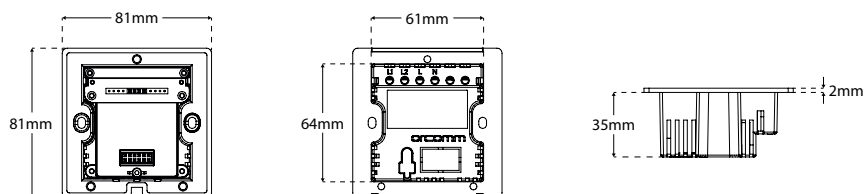

### General

Number of Gangs	1
Material	Polycarbonate
Colour	Black
Finish	Matt

### Environmental

IP Rating	IP20
IK Rating	IK04
Operating Temperature Range	-10 °C to 40 °C
Operating Humidity	20% - 85% RH
Operating Altitude	2000M

### Physical

Height (mm)	81mm
Width (mm)	81mm
Depth (mm)	37mm
Weight (grams)	N/A
Connection Terminals	Screw (Ph2 Drive)
Connection Terminals Capacity (1mm solid core)	4 Cables
Connection Terminals Capacity (1.5mm solid core)	3 Cables
Connection Terminals Capacity (2.5mm solid core)	2 Cables

### Electrical

Input Voltage Range	100-240Vac
Input Voltage Frequency Range	50/60Hz
Maximum Load Wattage	As per module installed
Minimum Load Wattage	2 LED Lamps per circuit
Maximum Load Rating (Va)	As per module installed
Standby Current	20mA
Notes	Requires Neutral

#### Connectivity

Radio Frequency	2.4GHz
Line of Sight Range (Plastic Plate) UPTO	20m
Line of Sight Range (Metal Plate) UPTO (Open space with no obstructions)	20m

#### Installation

Backbox Type	N/A
Backbox Depth (</ 1.5mm Cable)	40mm
Backbox Depth (</ 2.5mm Cable)	45mm
Backbox Mounting Tabs	2x Horizontal
Mounting	Wall
Fixing Mode	2x M3.5 Screw
Notes	N/A

#### Features

Dimming Type	N/A
Lamp Type	N/A
Operation	N/A
Smart Home Ready	Yes, Via gateway and Orcomm screen.

#### Standards, Approvals and Warranty

Standards	RoHS, TUV, CE, WEEE
Warranty	2 Year, RTB
Extended	Available on request

Product Coding Example: DILX-1G-CB

CODE

DILX-1G-CB

