


DILX-2G-CB - 2 Gang Control Box



Description

DIGILUX 2 gang control box constructed from Polycarbonate and finished in matt black.

Dimensions

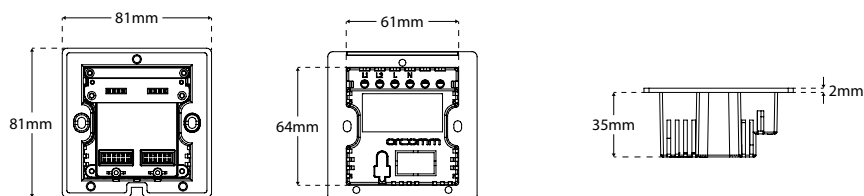

General

Number of Gangs	2
Material	Polycarbonate
Colour	Black
Finish	Matt

Environmental

IP Rating	IP20
IK Rating	IK04
Operating Temperature Range	-10 °C to 40 °C
Operating Humidity	20% - 85% RH
Operating Altitude	2000M

Physical

Height (mm)	81mm
Width (mm)	81mm
Depth (mm)	37mm
Weight (grams)	N/A
Connection Terminals	Screw (Ph2 Drive)
Connection Terminals Capacity (1mm solid core)	4 Cables
Connection Terminals Capacity (1.5mm solid core)	3 Cables
Connection Terminals Capacity (2.5mm solid core)	2 Cables

Electrical

Input Voltage Range	100-240Vac
Input Voltage Frequency Range	50/60Hz
Maximum Load Wattage	As per module installed
Minimum Load Wattage	2 LED Lamps per circuit
Maximum Load Rating (Va)	As per module installed
Standby Current	20mA
Notes	Requires Neutral

Connectivity

Radio Frequency	2.4GHz
Line of Sight Range (Plastic Plate) UPTO	20m
Line of Sight Range (Metal Plate) UPTO (Open space with no obstructions)	20m

Installation

Backbox Type	N/A
Backbox Depth (</ 1.5mm Cable)	40mm
Backbox Depth (</ 2.5mm Cable)	45mm
Backbox Mounting Tabs	2x Horizontal
Mounting	Wall
Fixing Mode	2x M3.5 Screw
Notes	N/A

Features

Dimming Type	N/A
Lamp Type	N/A
Operation	N/A
Smart Home Ready	Yes, Via gateway and Orcomm screen.

Standards, Approvals and Warranty

Standards	RoHS, TUV, CE, WEEE
Warranty	2 Year, RTB
Extended	Available on request

Product Coding Example: DILX-2G-CB

CODE

DILX-2G-CB