



## DILX-4G-CB - 4 Gang Control Box

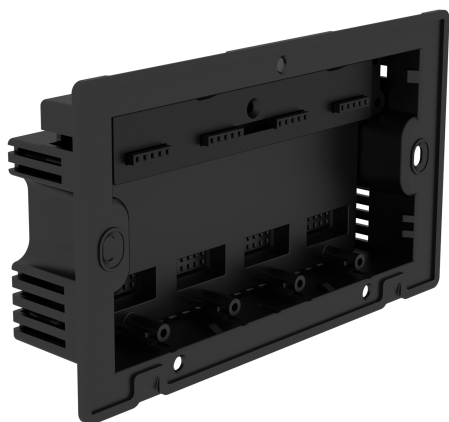

### Description

DIGILUX 4 gang control box constructed from Polycarbonate and finished in matt Black.

### Dimensions

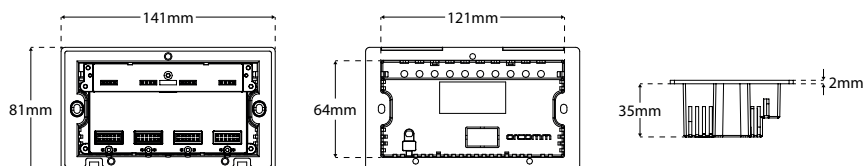

### General

|                 |               |
|-----------------|---------------|
| Number of Gangs | 4             |
| Material        | Polycarbonate |
| Colour          | Black         |
| Finish          | Matt          |

### Environmental

|                             |                 |
|-----------------------------|-----------------|
| IP Rating                   | IP20            |
| IK Rating                   | IK04            |
| Operating Temperature Range | -10 °C to 40 °C |
| Operating Humidity          | 20% - 85% RH    |
| Operating Altitude          | 2000M           |

### Physical

|  |                   |
|--|-------------------|
| Height (mm)                                      | 81mm              |
| Width (mm)                                       | 141mm             |
| Depth (mm)                                       | 37mm              |
| Weight (grams)                                   | N/A               |
| Connection Terminals                             | Screw (Ph2 Drive) |
| Connection Terminals Capacity (1mm solid core)   | 4 Cables          |
| Connection Terminals Capacity (1.5mm solid core) | 3 Cables          |
| Connection Terminals Capacity (2.5mm solid core) | 2 Cables          |

### Electrical

|                               |                         |
|-------------------------------|-------------------------|
| Input Voltage Range           | 100-240Vac              |
| Input Voltage Frequency Range | 50/60Hz                 |
| Maximum Load Wattage          | As per module installed |
| Minimum Load Wattage          | 2 LED Lamps per circuit |
| Maximum Load Rating (Va)      | As per module installed |
| Standby Current               | 20mA                    |
| Notes                         | Requires Neutral        |

#### Connectivity

|  |        |
|--|--------|
| Radio Frequency  | 2.4GHz |
| Line of Sight Range (Plastic Plate) UPTO                                 | 20m    |
| Line of Sight Range (Metal Plate) UPTO (Open space with no obstructions) | 20m    |

#### Installation

|                                |               |
|--------------------------------|---------------|
| Backbox Type                   | N/A           |
| Backbox Depth (</ 1.5mm Cable) | 40mm          |
| Backbox Depth (</ 2.5mm Cable) | 45mm          |
| Backbox Mounting Tabs          | 2x Horizontal |
| Mounting                       | Wall          |
| Fixing Mode                    | 2x M3.5 Screw |
| Notes                          | N/A           |

#### Features

|                  |                                     |
|------------------|-------------------------------------|
| Dimming Type     | N/A                                 |
| Lamp Type        | N/A                                 |
| Operation        | N/A                                 |
| Smart Home Ready | Yes, Via gateway and Orcomm screen. |

#### Standards, Approvals and Warranty

|           |                      |
|-----------|----------------------|
| Standards | RoHS, TUV, CE, WEEE  |
| Warranty  | 2 Year, RTB          |
| Extended  | Available on request |

#### Product Coding Example: DILX-4G-CB

#### CODE

DILX-4G-CB