



DILX-GW - Digilux Smart Lighting Gateway

DILX-GW



DETAILS

Material	Polycarbonate
Colour	Black/Red
Finish	Matt
Operating Temperature Range	-10 ° C to 40 ° C
Operating Humidity	20% - 85% RH
Operating Altitude	2000M
Height (mm)	26.7
Width (mm)	100
Depth (mm)	100
Mounting	Wall Mounted/Free standing


DESCRIPTION

Link the Digilux range of dimmers and switches to the cloud based Orcomm connect service.

The standalone gateway allows remote control of the Orcomm lighting control products to be controlled using a smart device, Amazon alexa and Google home voice services.

Connects using Wi-Fi or a hardwired internet connection.

LINE DRAWING

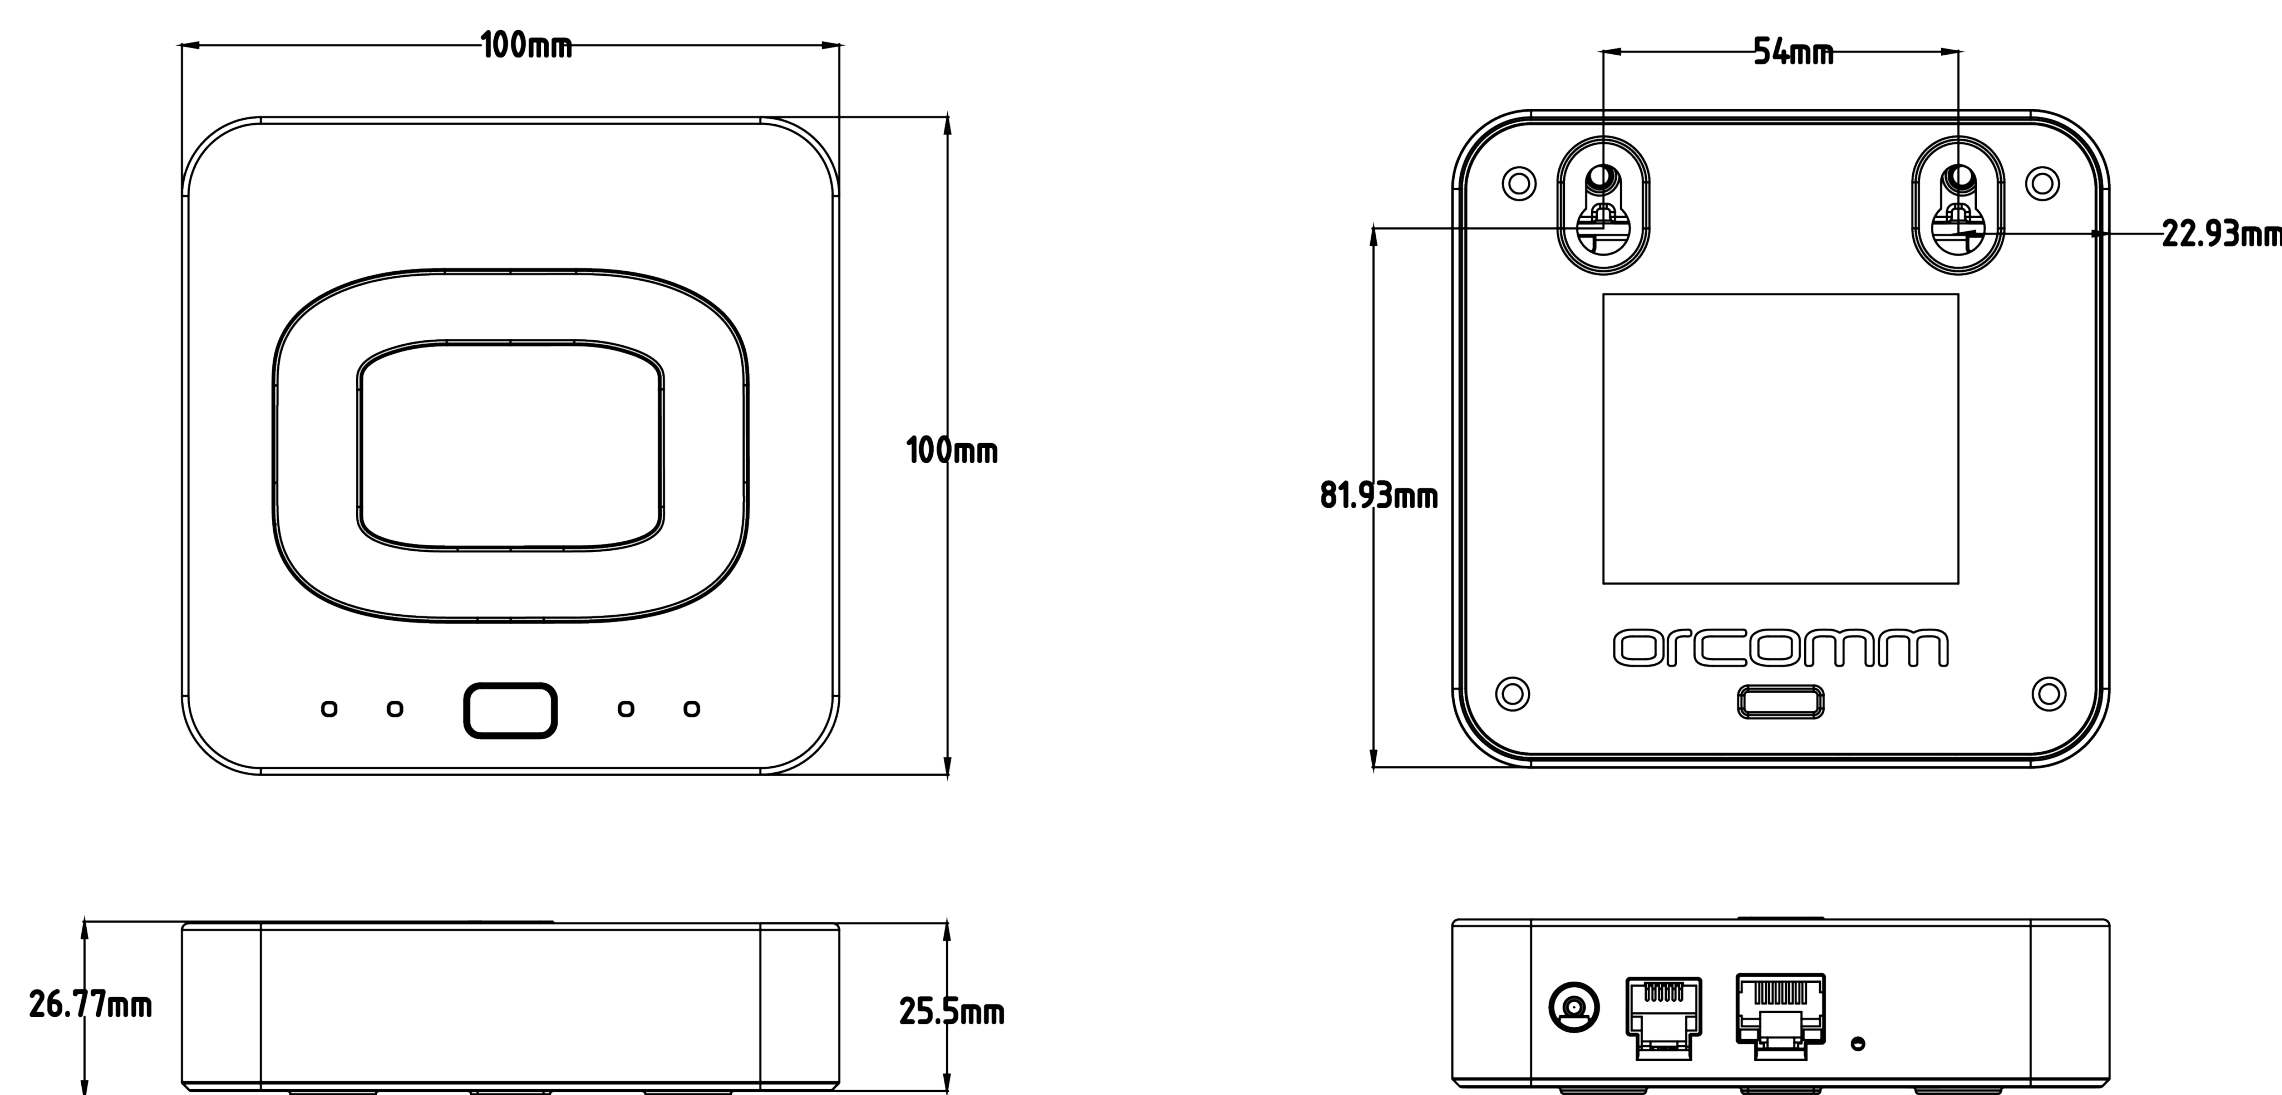

TECHNICAL INFORMATION

Power	12v DC
Current	1000 mA
Protocols	802.11 n/g, Zigbee 3.0
Communications	WiFi/LAN
Radio Frequency	2.4GHz
Standards	RoHS, TUV, CE, WEEE
Warranty	2 Year, RTB

NOTES

An active Orcomm Connect service is needed with this product.

Compatiable with the DIGILUX range of products from Orcomm.