

## **DIGITEX 3 GANG DATASHEET**

#### **DESCRIPTION**

Range of digital switches and dimmers designed for simplicity of use and installation. Touch sensitive interface combined with customisable icons. Available in 'master' and 'slave' configurations allowing for wireless two way communication and control. A master unit can have unlimited slave modules by means of wireless mesh network. Interchangeable screwless faceplates allows for the following options: Moulded plastic finished in Matt White, Black and Brushed Silver effect. Glass options are available in White or Black.

#### **FEATURES**

LIGHT SOURCE	Backlit LED
CONTACT	Touch Sensitive
INSTALLATION	Standard 35mm Electrical Back Box

### **ICON OPTION**

**STANDARD** 



LAMP



**PENDANT** 

#### **FINISHES**



MATT WHITE




GLASS BLACK






BRUSH SILVER

#### **SPECIFICATIONS - SWITCH**

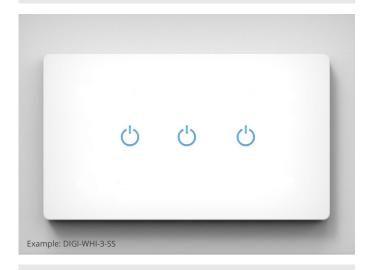

## **SPECIFICATIONS - DIMMER**



#### **MASTER**

POWER LOAD	300W per Channel (Orlight products) 200W per Channel (Standard LED)
VOLTAGE	220V - 240V
CONTROL	Two way wireless control using unlimited optional slave modules


#### **MASTER**


POWER LOAD	150W per Channel (Orlight products) 100W per Channel (Standard LED)
VOLTAGE	220V - 240V
CONTROL	Two way wireless dimming control using unlimited optional slave modules








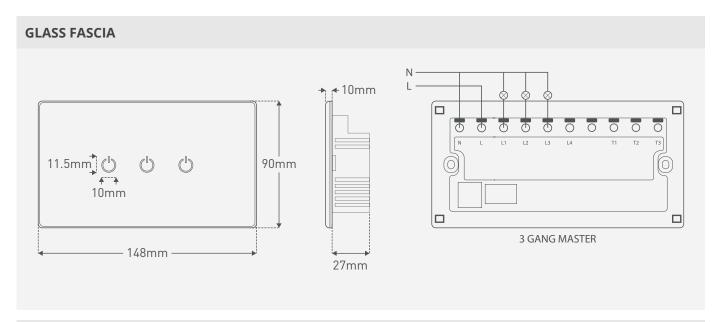

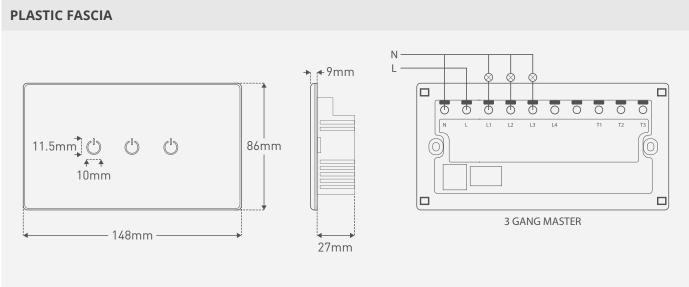

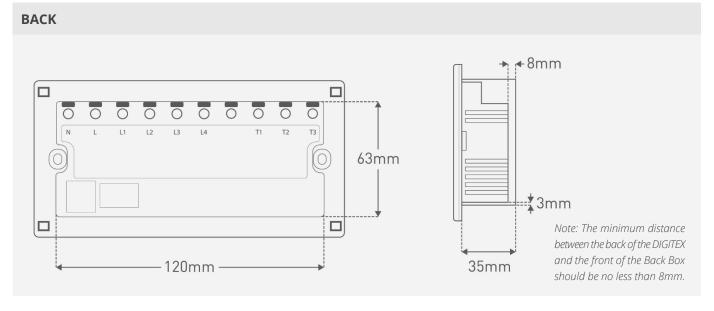





C

# **BUILD YOUR OWN DIGITEX**

You can find our online Digitex builder at www.orlight.uk

EXAMPLE PRO	DUCT CODE:	DIGI	- WHI	-	3	- L D -	P D -	ss-
DIGI	DIGITEX							
FINISH TYPE: WHI BLK BRS GWH GBL	WHITE PLASTIC MATT BLACK PLASTI BRUSHED SILVER PL WHITE GLASS BLACK GLASS							
GANG:	GANG							
L 5	STANDARD LAMP PENDANT  SWITCH DIMMER KILL SWITCH	Note: Repeat " gangs selected	"Icon Type" and I. Maximum of			-		
CONTROL TYPES F	PE: SLAVE FAN TIMER	Note: Pricing a	difference may c	apply betwe	een contro	types.		

