


Alarm Extension board

ORC-ALARM-16

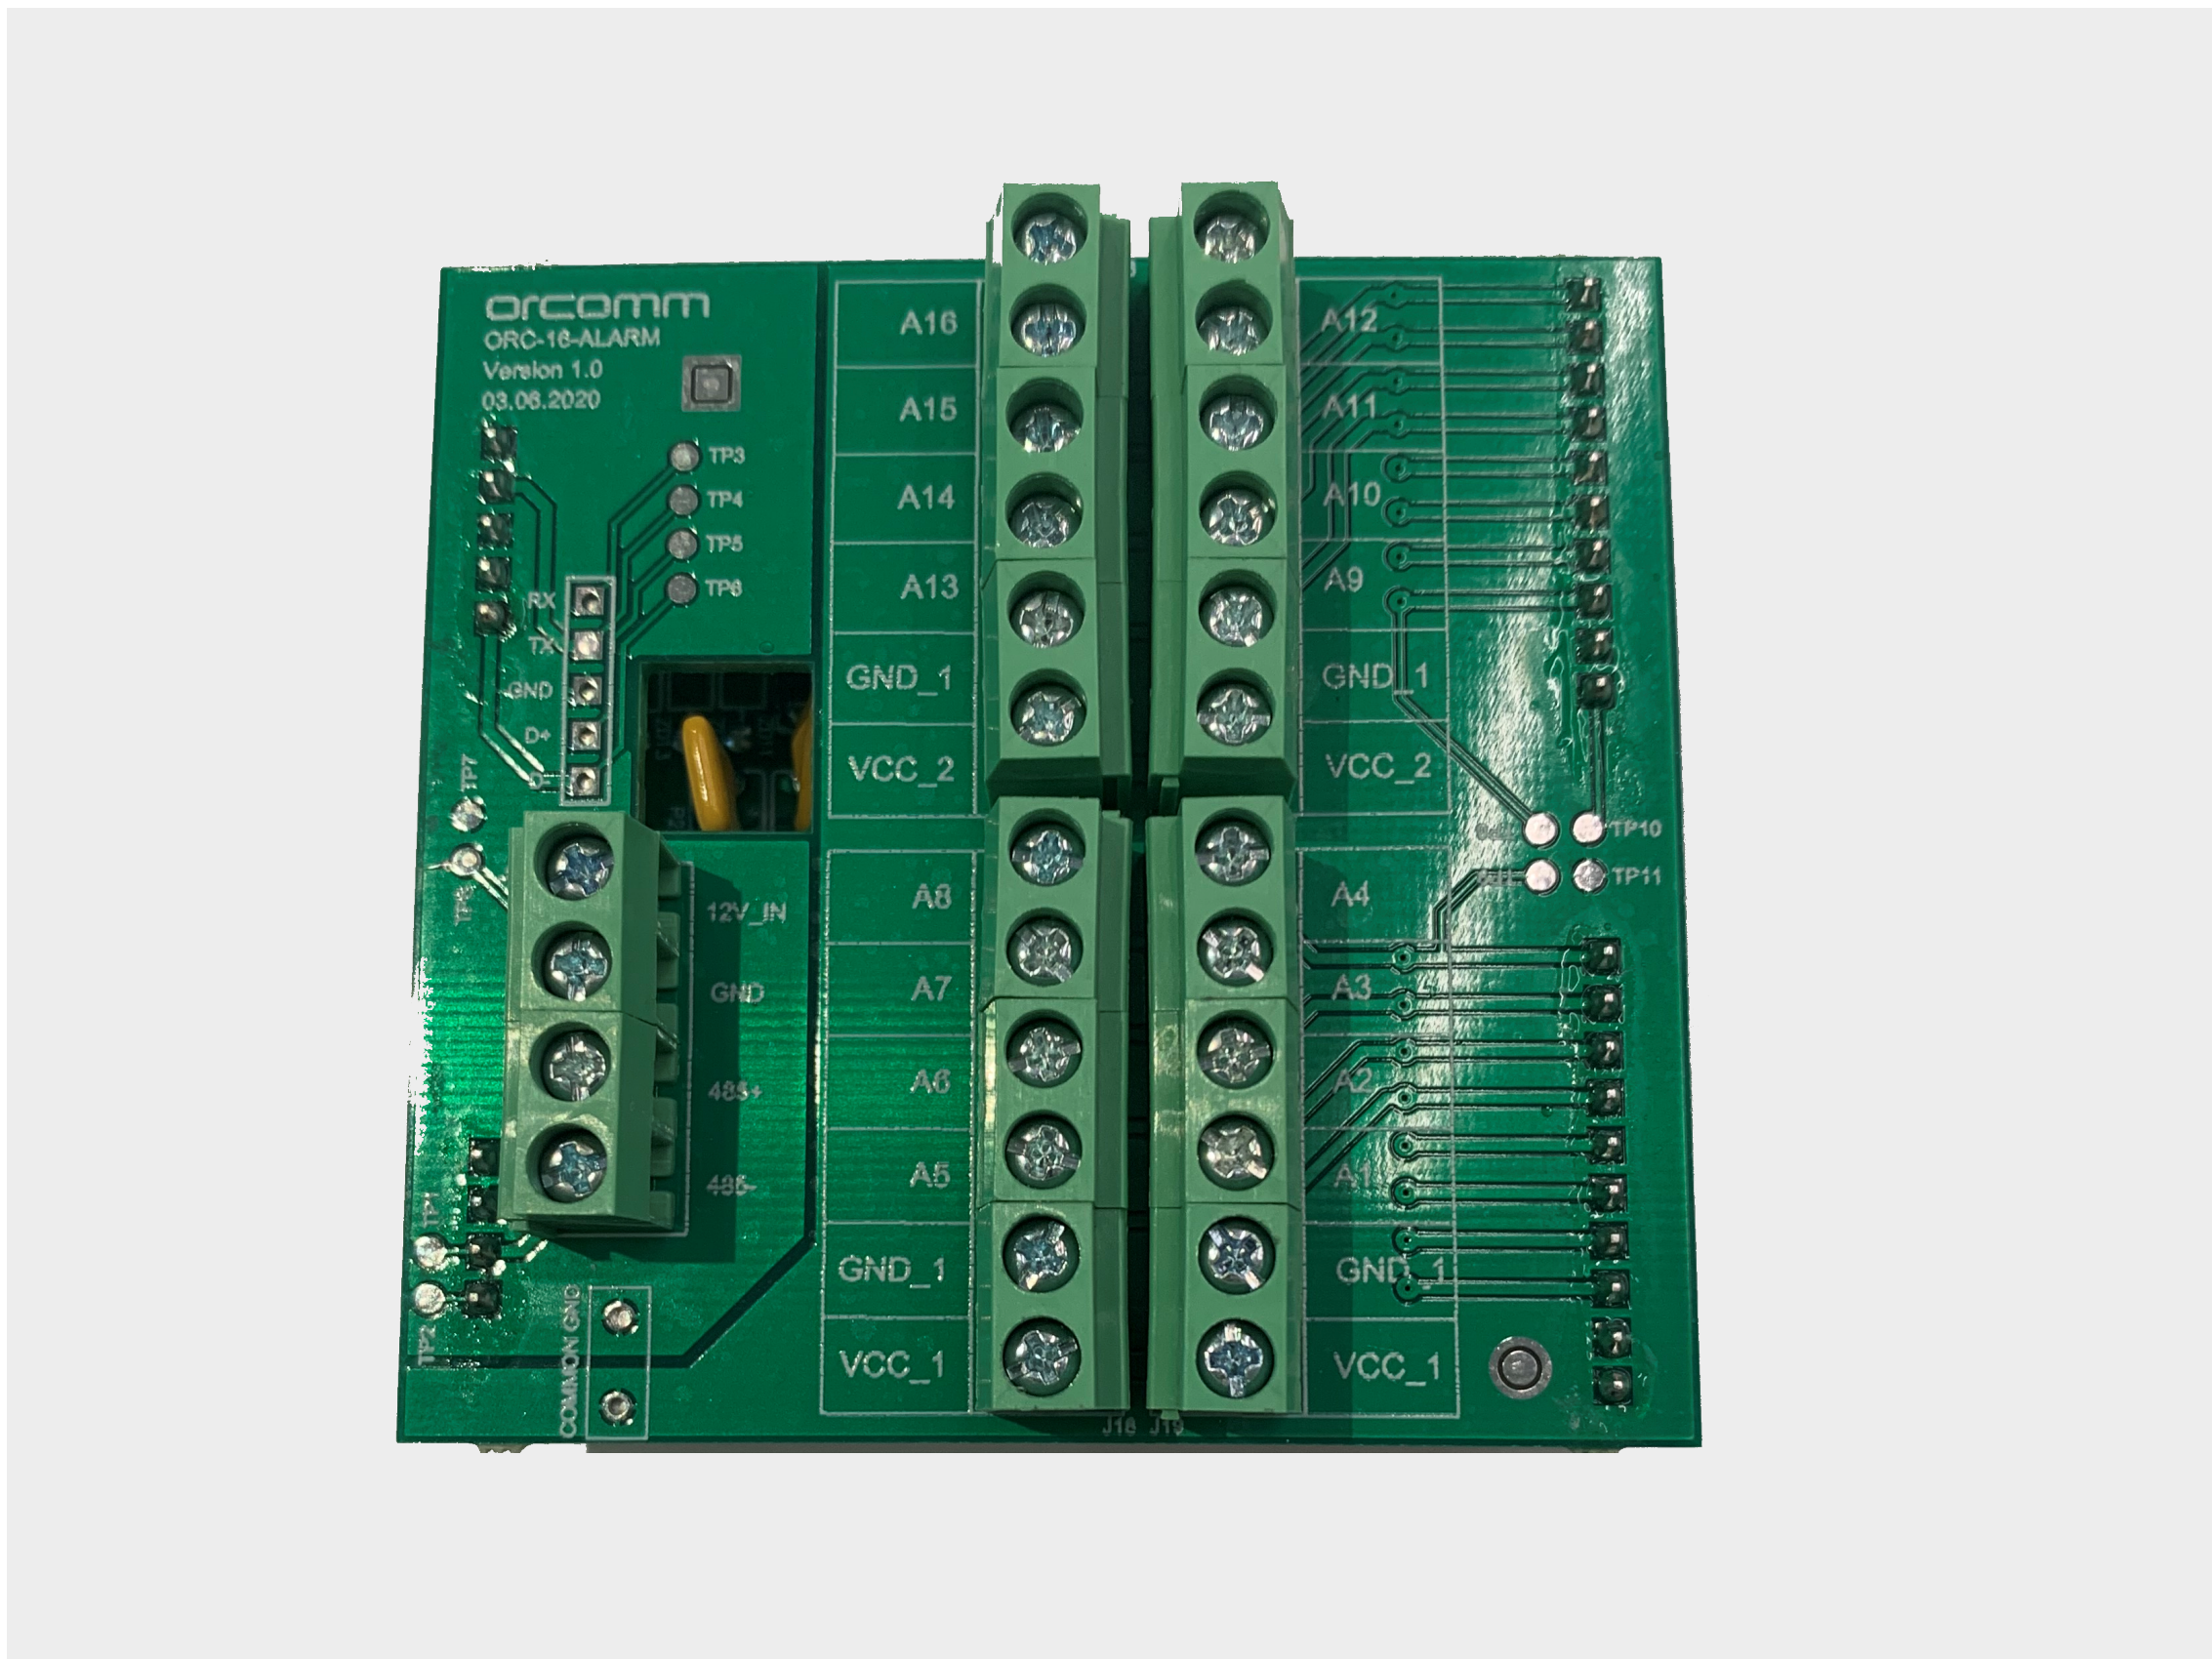

DETAILS

Size	90mm×90mm×40mm
Inputs	16
Outputs	None
Communication	RS485 / ORC-NET
Casing	None (PCBA)

DESCRIPTION

Alarm board designed to work with Orcomm Touch screens enabled with alarm module. The unit can be installed with multiple different sensors (up to 16) including Water Leak, Gas Leak, Smoke alarm, panic button, window / door contat, doorbell etc.

TECHNICAL INFORMATION

Mounting Type	Bracket / Post
Working Voltage	12V DC
Working Current	< 100mA
Rated Power	< 10W
Humidity	10% - 95% R.H
Temperature	< 60'C
Weight	0.1KG

NOTES

This unit must be installed on post or using DIN rail brackets ORC-BR-ALARM. If you require more than 16 inputs then an additional part can be installed ORC-ALARM-32