

Dimming Performance Test Results

LED information

Model	MTG21-WH-2700K-CRI90
Driver Product Code	DOMINO-250MA-DR-DIM
Batch No.	DRV - 21973ENG - ORL727
LED Type	Engine + Driver
Soft Start	No
Rated Power (W)	10
Type	LED
Control Type	Trailing


LED Image



Switch / control information

Dimmer Switch Model	DIGI-DM
PerformanceMin-Typical (MAX)	1-12 (12)
Range% (no. of lamps)	10-100 (1-4)15-100 (5-12)
MinSet	10%-15% see notes
MaxSet	Factory Default
Dimming set to	Trailing

Additional Image

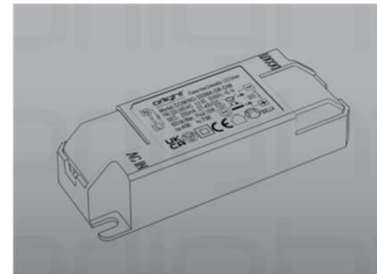

Testing Environment

Voltage	232
F (Hz)	50
Room temp	22
Current Draw (Max)	N/A
PF at Max	N/A
Tester Initials	JS
Date	31/10/2021

Printed Date 02/12/2021

Overall performance

Overall Rating	Holy Grail	
Diming Smoothness	OK	
Audible Noise on Dimmer	No noise	
Audible Noise on Driver	No noise	
Comments	Smooth dimming and stable. One can dim to lowest point 10% and lamps are stable. However, when more than 4 lamps are introduced, some lamps may not switch on at the lowest dim point. Can be resolved by trimming min to 1 step up.	
Other Comments	N/A	

Other Reference MTG21_WH_2700K_CRI90 DOMINO_250MA_DR_DIM